




ENIECLKCBPIM45200432AV



FEATURES	
Technology	SMART PIM
Energy Metering	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Power Factor
Metering per Output Receptacle	No
Environmental port	Yes
Networking	HTTP(s); SSH; RS-232 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS
Remote Management	Yes
Remote Outlet Switching	No
Daisy Chain	Yes
Display	YES (LCD SELECTABLE DISPLAY)
Environmental Sensors	EMD all in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration Sensor)
INPUT	
Plug	IEC60309 32A Commando plug
Lead length	3 Meters
Cable type	3M H07RN-F3G4 mm ² Power lead
Max. Input Load	32 A
Rated Input voltage	250 VAC
Frequency	50-60 Hz
Power capacity	22,1 kW
OUTPUT	
Rated Output voltage	190-240V
Output types	(20) IECC13 Sockets Lock (10A Rated)+(4) IECC19 Sockets Lock (16A Rated)
Overload Protection	YES (2) 1 Pole Magnetic Hydraulic CB 16A
CHASIS	
Dimensions (W x D x H)	50 x 72 x 1660 mm
Color	Black powder coat
Mounting Options	IPFIX 001; IPFIX 002; IPFIX 003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	

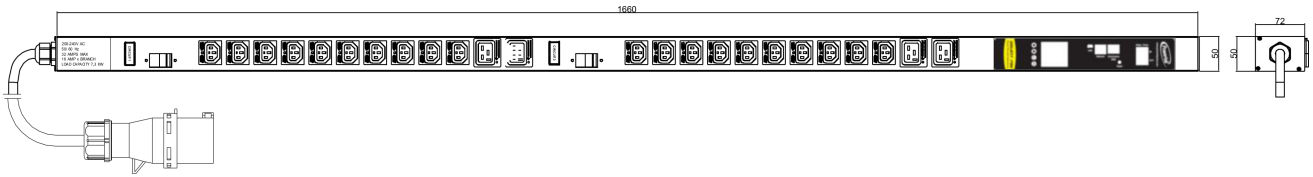