








ENIECLKCBPOM50200432AV

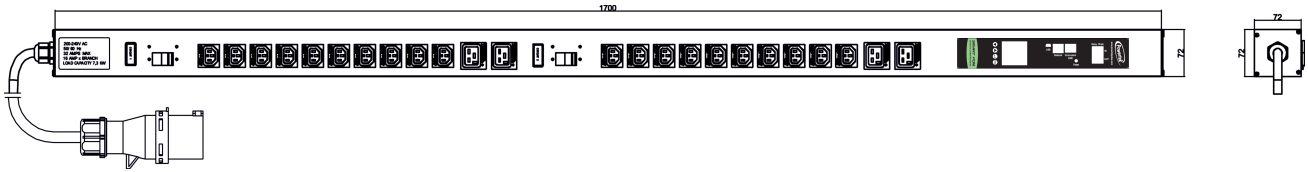

FEATURES	
Technology	SMART POM
Energy Metering	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Power Factor
Metering per Output Receptacle	Yes
Environmental port	Yes
Networking	HTTP(s); SSH; RS-232 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS
Remote Management	Yes
Remote Outlet Switching	No
Daisy Chain	Yes
Display	YES (LCD SELECTABLE DISPLAY)
Environmental Sensors	EMD all in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration Sensor)
INPUT	
Plug	IEC 60309 32A P+N+E
Lead length	3 Meters
Cable type	H07RN-F3G4 mm ²
Max. Input Load	32 A
Rated Input voltage	190-240V
Frequency	50-60 Hz
Power capacity	7.2 kW
OUTPUT	
Rated Output voltage	190-240V
Output types	20 IEC60320C13 Lock(10A) + 4 IEC60320C19 Lock(16A)
Overload Protection	YES (Magnetic Hydraulic Circuit Breaker)
CHASIS	
Dimensions (W x D x H)	72 x 72 x 1700 mm
Color	Black powder coat
Mounting Options	IPFIX 001; IPFIX 002; IPFIX 003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	

Copyright 2016 - Powertek

RoHS Compliant

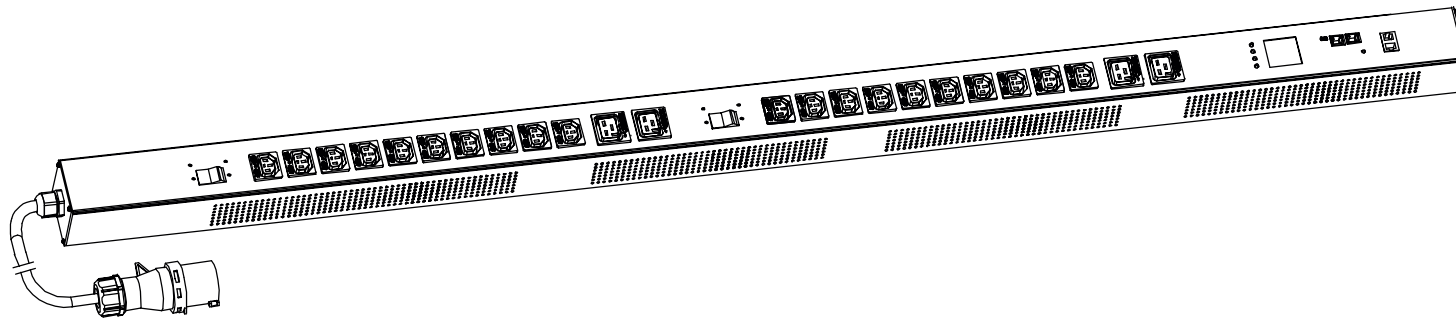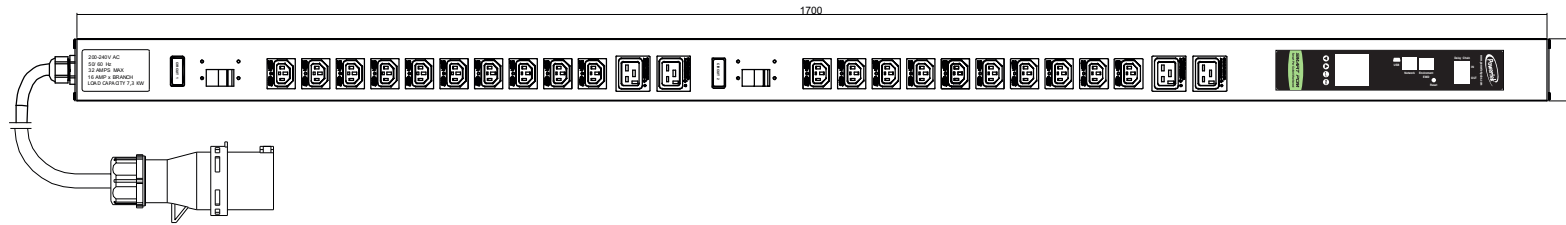

<p>POM Series</p> <p>Inlet Power monitoring Per outlet monitoring Environmental monitoring</p>	<p>OUTPUT</p> <p>(20) IECC13 Locking (10A Rated) (4) C19 Locking (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>220VAC 32A 50HZ IEC60309 32A 3Pin plug 3M H07RN-F3G4.0mm Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 2 Pole 16A Hydraulic-Magnetic Circuit Breaker</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX006</p>

Revisions		
Rev	Description	Date

DRAWING TYPE	
 <small>(NO PERMISSION, NO CHANGING)</small>	
unit=mm	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE	
FILLET	R0.5
ANGLE	±0.5°
FIRST ANGLE	

ENIECLKCBPOM50200432AV	
Housing	Aluminium
	Black Powder coating
DATE 23-11-2016	