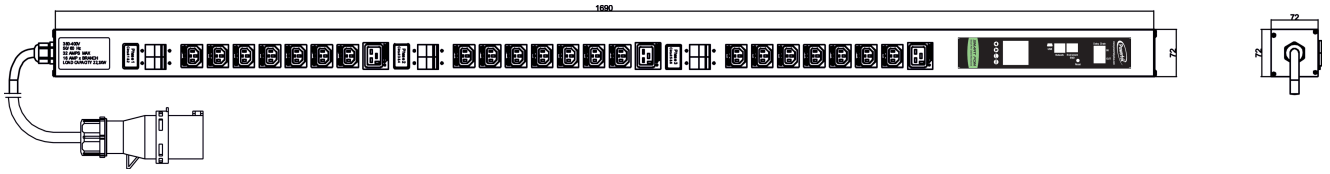




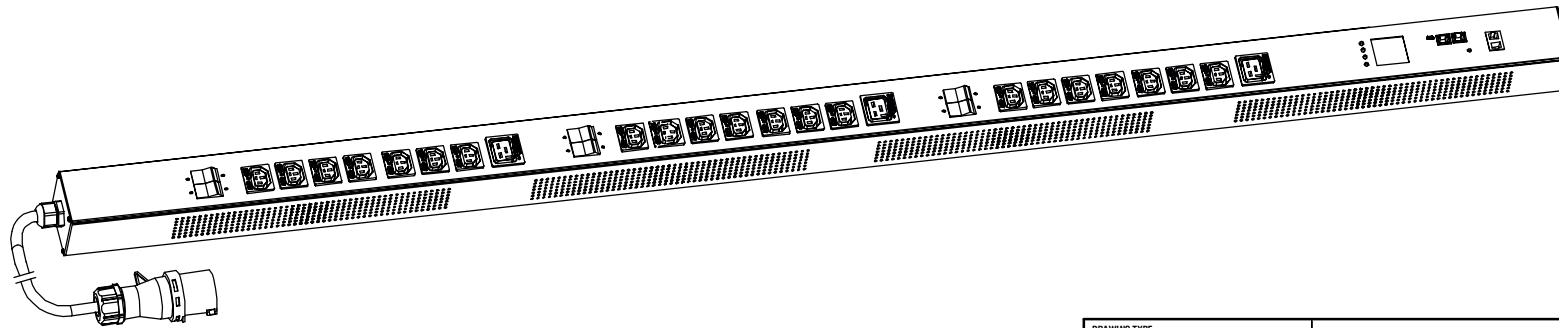

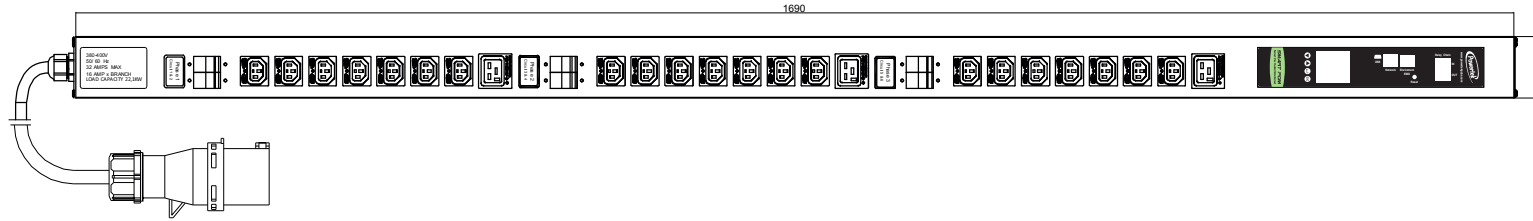
ENIECLKCBPOM5021032A3PV






FEATURES	
Technology	SMART POM
Energy Metering	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Power Factor
Metering per Output Receptacle	Yes
Environmental port	Yes
Networking	HTTP(s); SSH; RS-232 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS
Remote Management	Yes
Remote Outlet Switching	No
Daisy Chain	Yes
Display	YES (LCD SELECTABLE DISPLAY)
Environmental Sensors	EMD all in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration Sensor)
INPUT	
Plug	IEC 60309 32A 3P+N+E
Lead length	3 Meters
Cable type	H07RN-F5G6 mm ²
Max. Input Load	32 A
Rated Input voltage	380 -400V 3PHASE WYE
Frequency	50-60 Hz
Power capacity	22,1 kW
OUTPUT	
Rated Output voltage	190-240V
Output types	21 IEC60320C13 Lock(10A) + 3 IEC60320C19 Lock(16A)
Overload Protection	YES (Magnetic Hydraulic Circuit Breaker)
CHASIS	
Dimensions (W x D x H)	72 x 72 x 1690 mm
Color	Black powder coat
Mounting Options	IPFIX 001; IPFIX 002; IPFIX 003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	

Copyright 2016 - Powertek

RoHS Compliant



POM Series Inlet Power monitoring Per outlet monitoring Environmental monitoring	OUTPUT (21) IEC13 locking (10A Rated) (3) C19 Locking (16A Rated)	OPERATING TEMPERATURE 0° to 60°C	Revisions		
			Rev	Description	Date
INPUT 400VAC 32A 50HZ IEC60309 32A 3Phase plug(Red) 3M H07RN-F5G6.0mm Power lead	BRANCH CIRCUITS (6) 1 Pole 16A Hydraulic-Magnetic Circuit Breaker	MOUNTING ACCESORIES (2) IPFIX001 (2) IPFIX002 (2) IPFIX006			

DRAWING TYPE  (NO PERMISSION, NO CHANGING)		ENIECLKCBPOM5021032A3PV	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder coating
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			
DATE 23-11-2016			