
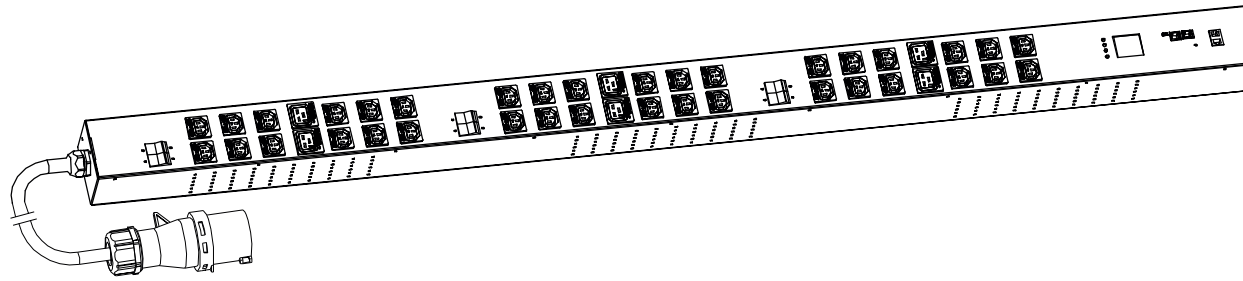

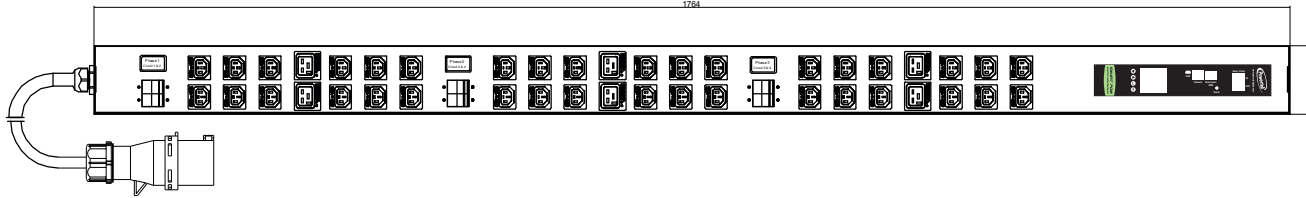






FEATURES	
Technology	SMART POM
Energy Metering	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Power Factor
Metering per Output Receptacle	Yes
Environmental port	Yes
Networking	HTTP(s); SSH; RS-232 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS
Remote Management	Yes
Remote Outlet Switching	No
Daisy Chain	Yes
Display	YES (LCD SELECTABLE DISPLAY)
Environmental Sensors	EMD all in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration Sensor)
INPUT	
Plug	IEC 60309 32A 3P+N+E
Lead length	3 Meters
Cable type	H07RN-F5G6 mm ²
Max. Input Load	32 A
Rated Input voltage	380 -400V 3PHASE WYE
Frequency	50-60 Hz
Power capacity	22,1 kW
OUTPUT	
Rated Output voltage	190-240V
Output types	36 IEC60320 C13 Lock(10A) + 6 IEC60320 C19 Lock(16A)
Overload Protection	YES (Magnetic Hydraulic Circuit Breaker)
CHASIS	
Dimensions (W x D x H)	76.5 x 101.5 x 1764 mm
Color	Black powder coat
Mounting Options	IPFIX 001; IPFIX 002; IPFIX 003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	

Copyright 2016 - Powertek

RoHS Compliant



<p>POM Series</p> <p>Inlet Power monitoring Per Outlet monitoring Environmental monitoring</p>	<p>OUTPUT</p> <p>(36) IEC C13 Locking (10A Rated) (6) IEC C19 Locking (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>400VAC 32A 50HZ IEC60309 32A 3Phase plug 3M H07RN-F5G6mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(6) 1 Pole Magnetic Hydraulic CB 16A</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002</p>

<p>DRAWING TYPE</p>  <p>(NO PERMISSION, NO CHANGING)</p>	<p>ENIECLKCBPOM60360632A3PV</p>	
<p>TECHNICAL STANDARD</p> <p>1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE</p>	<p>MATERIAL:</p>	
<p>FILLET</p>	<p>R0.5</p>	
<p>ANGLE</p>	<p>±0.5°</p>	
<p>FIRST ANGLE</p> 		
<p>DATE 23-11-2016</p>		