








ENIECLKPIM45210316A3PV

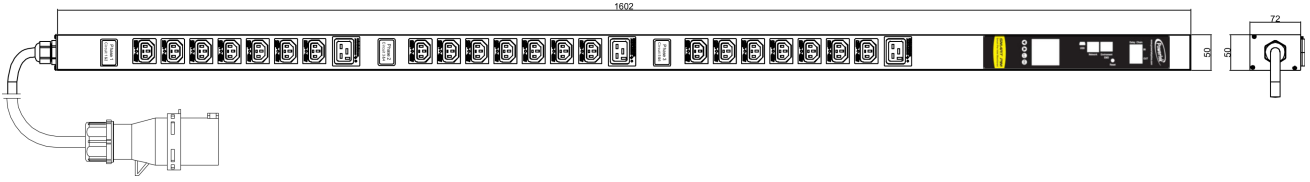

| FEATURES | |
|---------------------------------|---|
| Technology | SMART PIM |
| Energy Metering | Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Power Factor |
| Metering per Output Receptacle | No |
| Environmental port | Yes |
| Networking | HTTP(s); SSH; RS-232 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS |
| Remote Management | Yes |
| Remote Outlet Switching | No |
| Daisy Chain | Yes |
| Display | YES (LCD SELECTABLE DISPLAY) |
| Environmental Sensors | EMD all in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration Sensor) |
| INPUT | |
| Plug | IEC60309 16A 3Phase plug |
| Lead length | 3 Meters |
| Cable type | 3M H07RN-F5G2.5 mm ² Power lead |
| Max. Input Load | 16 A |
| Rated Input voltage | 400 VAC |
| Frequency | 50-60 Hz |
| Power capacity | 3,6 kW |
| OUTPUT | |
| Rated Output voltage | 190-240V |
| Output types | (20) IECC13 Locking (10A Rated)+(4) IECC19 Locking (16A Rated) |
| Overload Protection | No |
| CHASIS | |
| Dimensions (W x D x H) | 50 x 72 x 1602 mm |
| Color | Black powder coat |
| Mounting Options | IPFIX 001; IPFIX 002; IPFIX 003 |
| OPERATING ENVIRONMENTAL | |
| Temperature Range | 0° to 60° C (30° to 140° F) |
| Relative humidity | 0 - 95 % |
| Elevation | 0 - 4000 Meters |
| CONFORMANCE | |
| CE, RoHS Compliant, IEC 60950-1 | |

Copyright 2016 - Powertek

RoHS Compliant

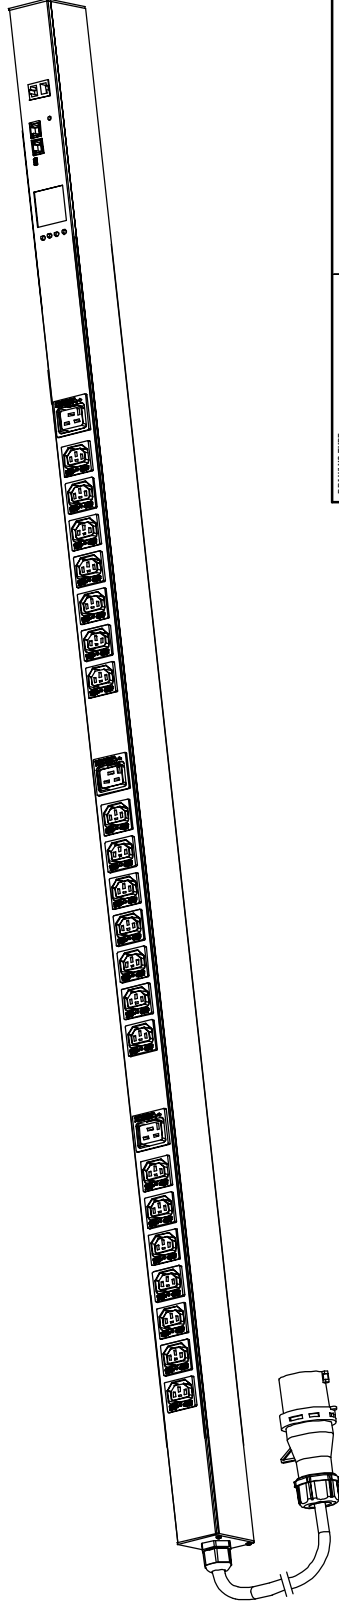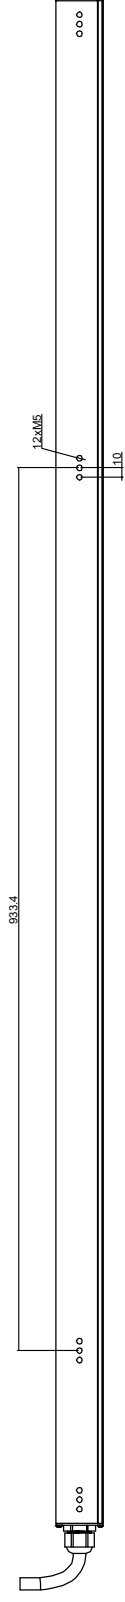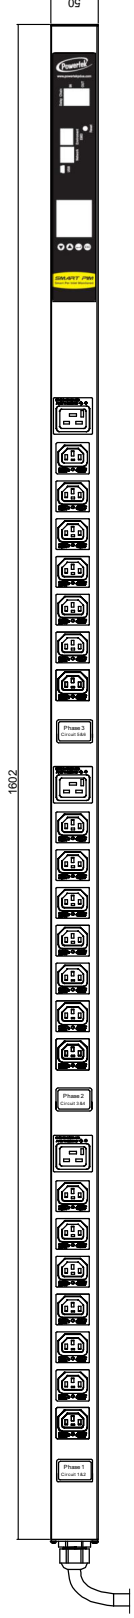

ENIECLKPIM45210316A3PV

Aluminum

Black Powder coating

Housing:

TECHNICAL STANDARD
1. I.T11;
2. NO RUSTNESS
3. NO FLAW ON THE SURFACE

FILLET R0.5

ANGLE $\pm 0.5^\circ$

FIRST ANGLE



DATE 25-11-2016

OPERATING TEMPERATURE

0° to 60°C

OUTPUT

(21) IEC C13 Locking (10A Rated)
(3) IEC C19 Locking (16A Rated)

PIM Series

Inlet Power monitoring
Environmental monitoring

MOUNTING ACCESSORIES

(2) IPFIX001
(2) IPFIX002
(2) IPFIX003

BRANCH CIRCUITS

(NONE)

INPUT

400VAC 16A 50HZ
IEC60309 16A 3Phase plug
3M H07RN-F5G2.5mm Power lead