IEXCB454232A3PV

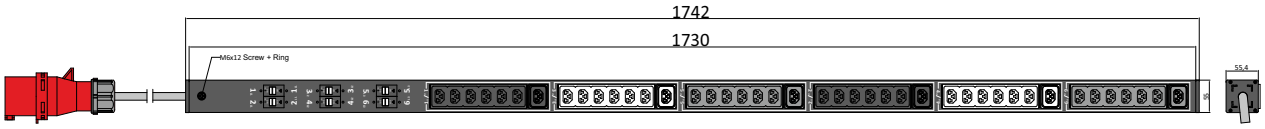

FEATURES	
Technology	Basic
Energy Metering	No
Metering per Input Line	No
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	No
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC60309 3P+N+E 6h 32A 380-415V
Lead Length	3 meter
Cable Type	H07RN-F5G4.0 mm²
Max. Input Load	32A
Rated Input Voltage	380-415V three phase
Frequency	50-60Hz
Power Capacity	22.1kW
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	42 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(6) 1 Pole Carling 16A L31-X1-00-445-H62-D3
CHASSIS	
Dimensions (W x D x H)	1742 x 55 x 55.4 mm
Color	RAL 9004 black powder coat
Mounting Options	4 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0º to 60º C (30º to 140º F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	

More information at: www.powertekpdus.com - ©Powertek Industries Ltd. All Rights Reserved

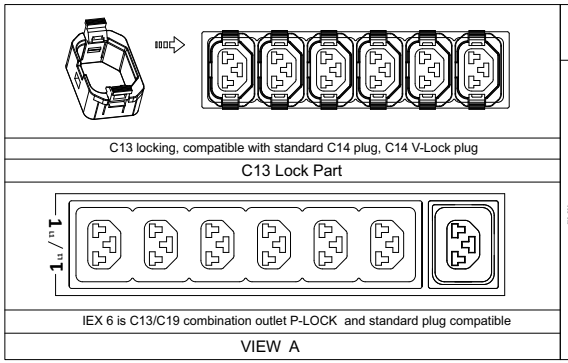

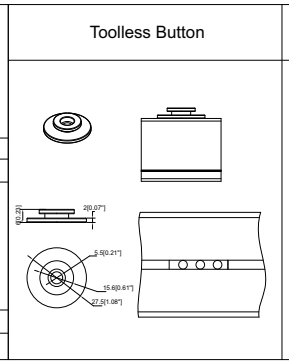

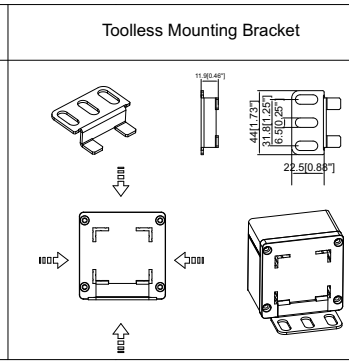

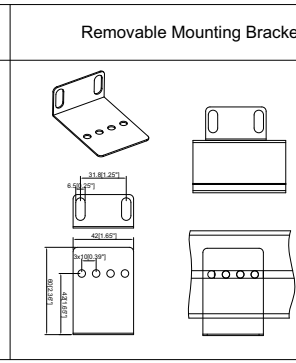

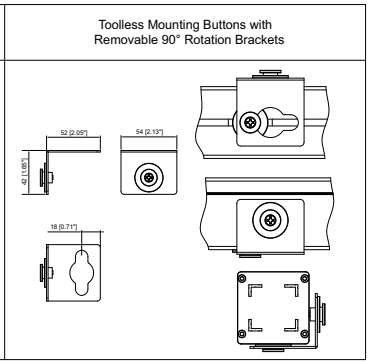

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

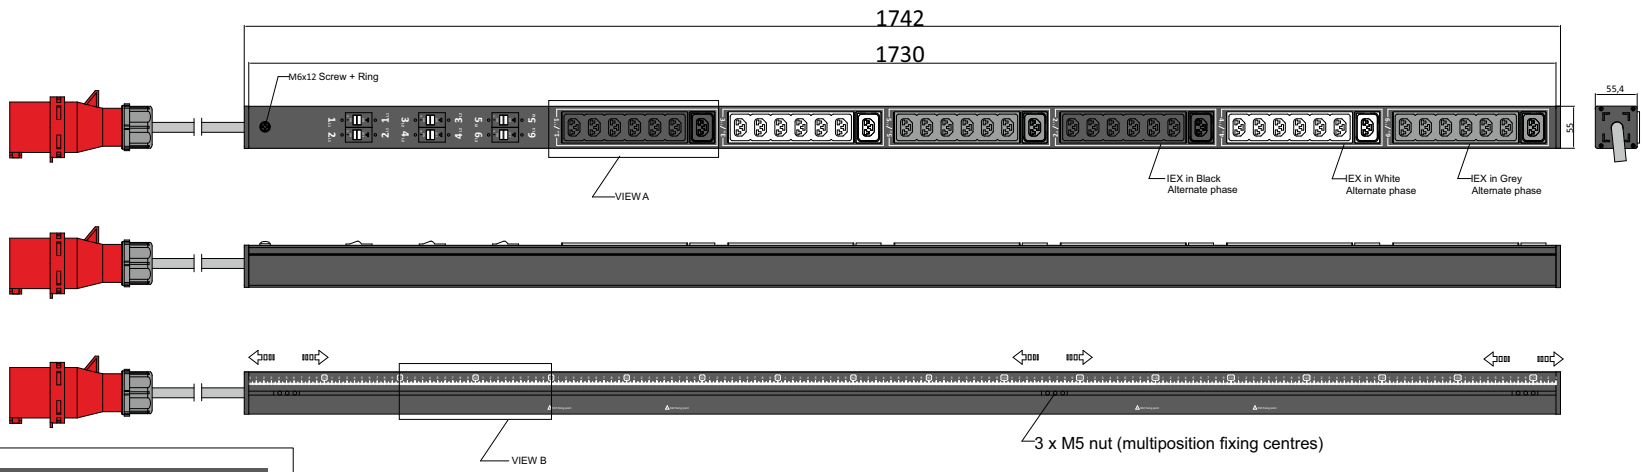

VIEW B:

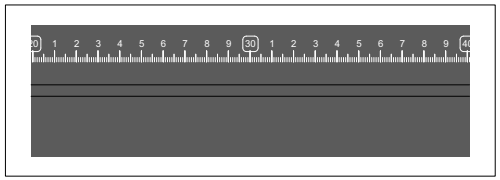

Packing content:

IEX Lock-VP X42

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(14) IEX (C13/C19) combo Black (Max rate 16A) (14) IEX (C13/C19) combo White (Max rate 16A) (14) IEX (C13/C19) combo Grey (Max rate 16A)	0° to 60°C
INPUT	**BRANCH CIRCUITS**	**MOUNTING ACCESORIES**
380-415VAC 32A 50HZ IEC60309 32A 3P+N+E Plug 3m H07RN-F5G4.0mm² Power Lead	(6) 1 Pole Carling 16A L31-X1-00-445-H62-D3	(2) Toolless Button (2) Toolless Mounting Bracket (2) Removable Mounting Brackets (2) Toolless Mounting Buttons with Removable 90° Rotation Brackets

Revisions		
Rev	Description	Date

DRAWING TYPE
CATIA
(NO PERMISSION.NO CHANGING)

unit=mm

TECHNICAL STANDARD
IT11;
NO RUST
NO FLAW ON THE SURFACE

FILLET	R0.5
ANGLE	±0.5°

FIRST ANGLE

IEXCB454232A3PV

Housing	Aluminium
	Black Powder Coating
	RAL9004

Powertek™

DATE 27-05-2021

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION

C14 - C13 Sleeve
H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✔	✔	✔
Red	✔	✔	✔
Blue	✔	✔	✔

C14PLOCK - C13 Sleeve
H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✔	✔	✔
Red	✔	✔	✔
Blue	✔	✔	✔

C20PLOCK - C19Sleeve
H05VV-F3G1,5 mm²

Color	1M	2M
Black	✔	✔
Red	✔	✔
Blue	✔	✔

C20PLOCK - C13Sleeve
H05VV-F3G1 mm²

Color	1M	2M
Black	✔	✔
Red	✔	✔
Blue	✔	✔

CA001-2213

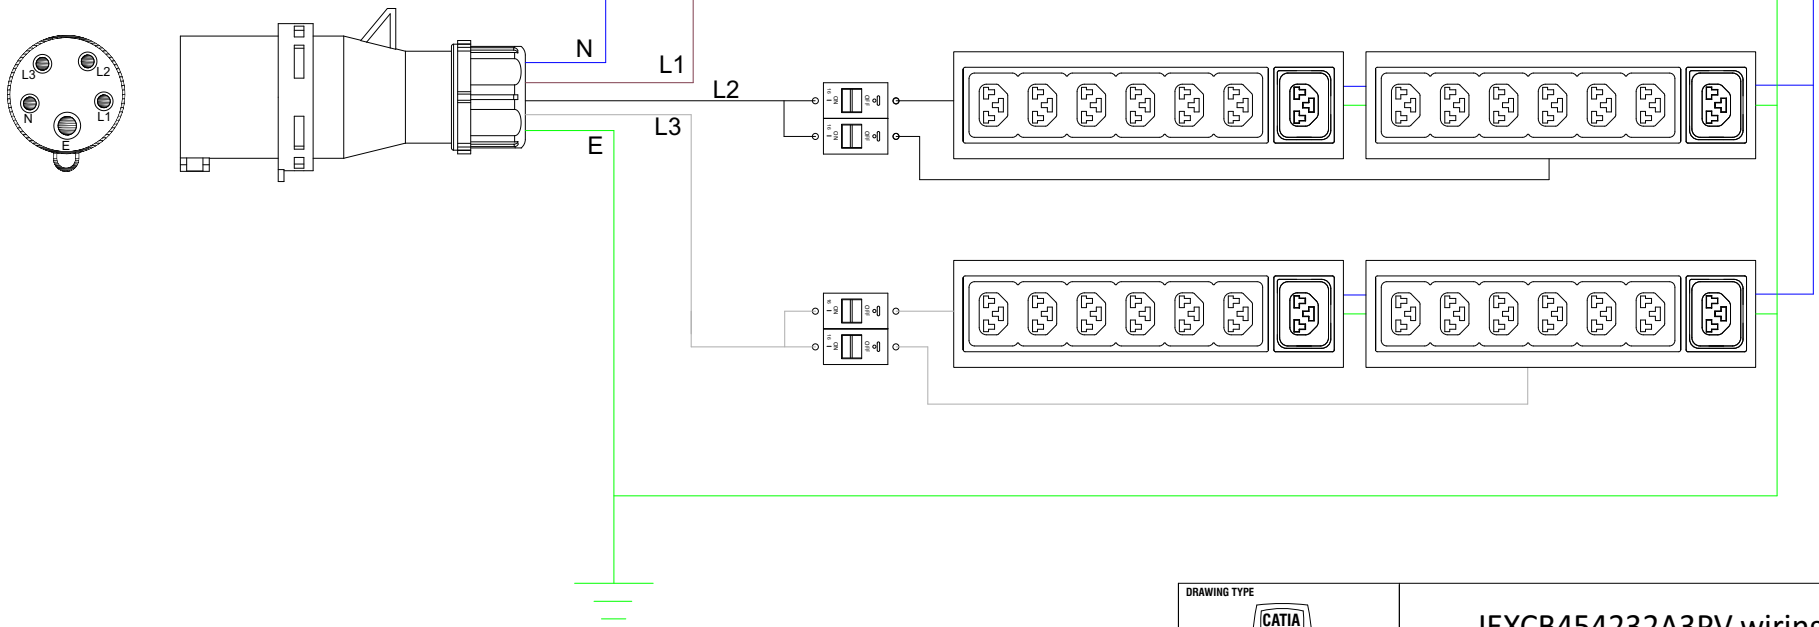

DRAWING TYPE CATIA (NO PERMISSION.NO CHANGING)	IEXCB454232A3PV-wiring	
unit=mm	Housing	Aluminium
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE		Black Powder Coating
		RAL9004
FILLET R0.5		
ANGLE ±0.5°		
FIRST ANGLE	Powertek™	
	DATE 27-05-2021	