

FEATURES	
Technology	Basic
Energy Metering	No
Metering per Input Line	No
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	No
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC60309 3P+N+E 6h 16A 380-415V
Lead Length	3 meter
Cable Type	H07RN-F5G2.5 mm <sup>2</sup>
Max. Input Load	16A
Rated Input Voltage	380-415V three phase
Frequency	50-60Hz
Power Capacity	11kW
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	36 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	None
CHASSIS	
Dimensions (W x D x H)	1212 x 55 x 55.4 mm
Color	RAL 9004 black powder coat
Mounting Options	4 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf·cm or 22.4 in·lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	

More information at: [www.powertekpdu.com](http://www.powertekpdu.com) - ©Powertek Industries Ltd. All Rights Reserved



- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

# IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



## C14 - C13 Sleeve

H05VV-F3G1 mm<sup>2</sup>

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓

## C14PLOCK - C13 Sleeve

H05VV-F3G1 mm<sup>2</sup>

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓

## C20PLOCK - C19 Sleeve


H05VV-F3G1,5 mm<sup>2</sup>



Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

## C20PLOCK - C13 Sleeve


H05VV-F3G1 mm<sup>2</sup>

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓


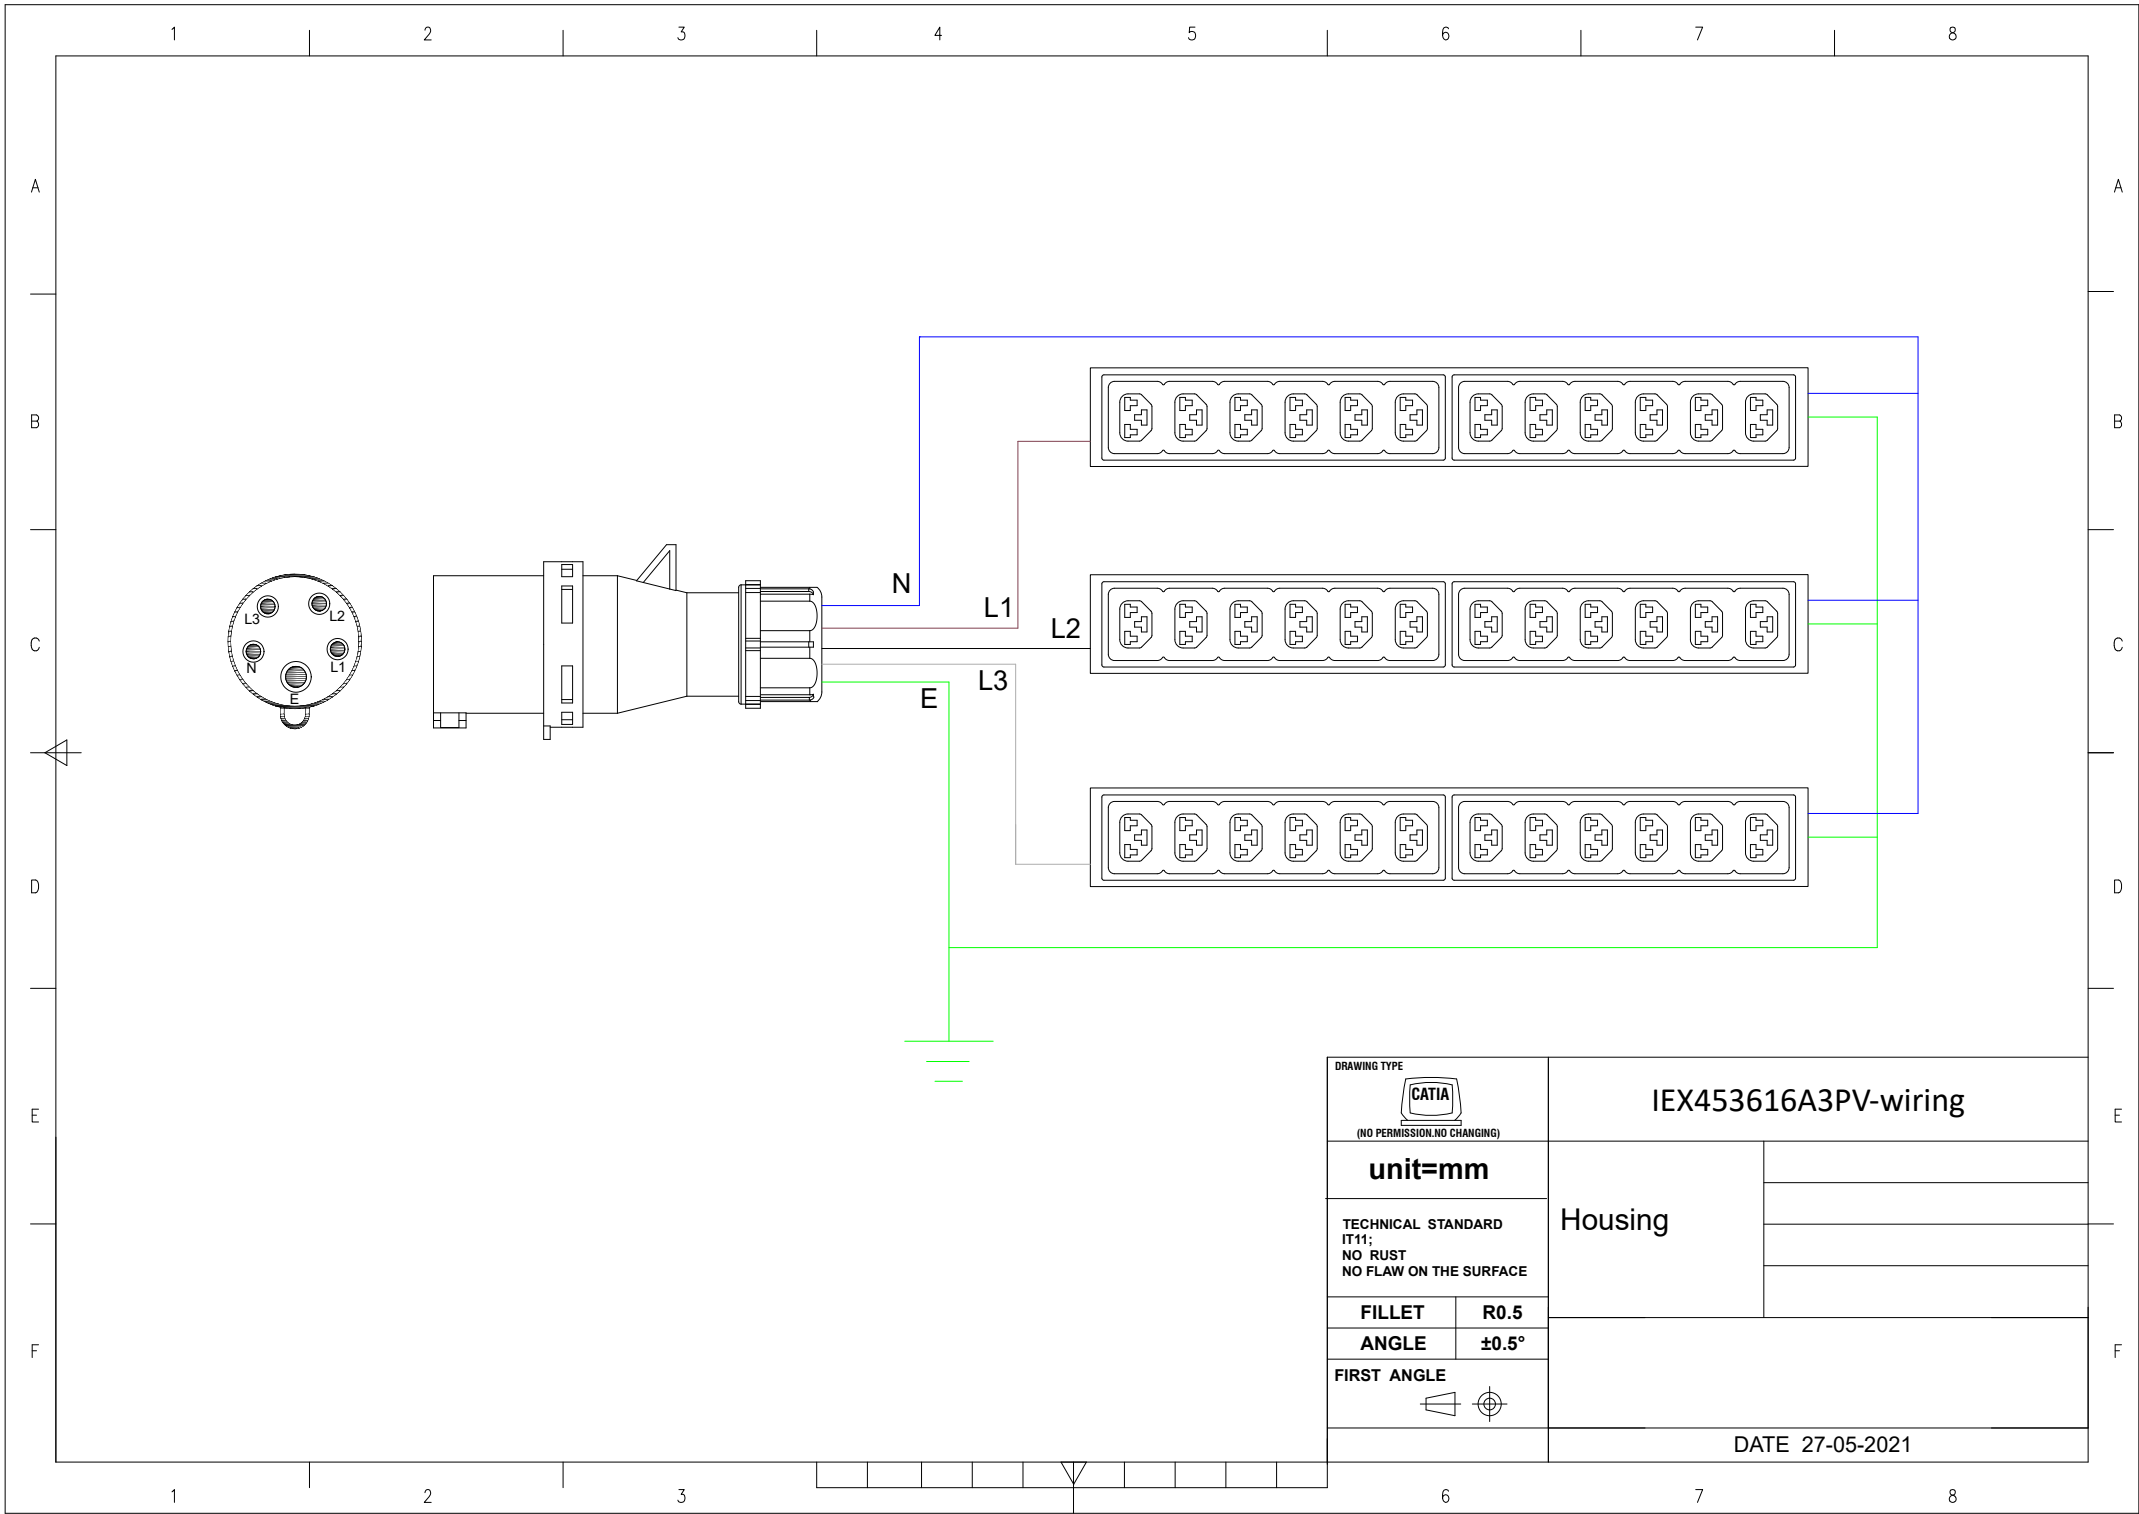


DRAWING TYPE		IEX453616A3PV-wiring	
 <small>(NO PERMISSION.NO CHANGING)</small>		Housing	
<b>unit=mm</b>			
<small>TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE</small>			
<b>FILLET</b>	<b>R0.5</b>		
<b>ANGLE</b>	<b>±0.5°</b>		
<b>FIRST ANGLE</b>			
			
		DATE 27-05-2021	

QTY	Part No.
12	IEXLOCKB
12	IEXLOCKW
12	IEXLOCKG



QTY	Part No.
3	BO002

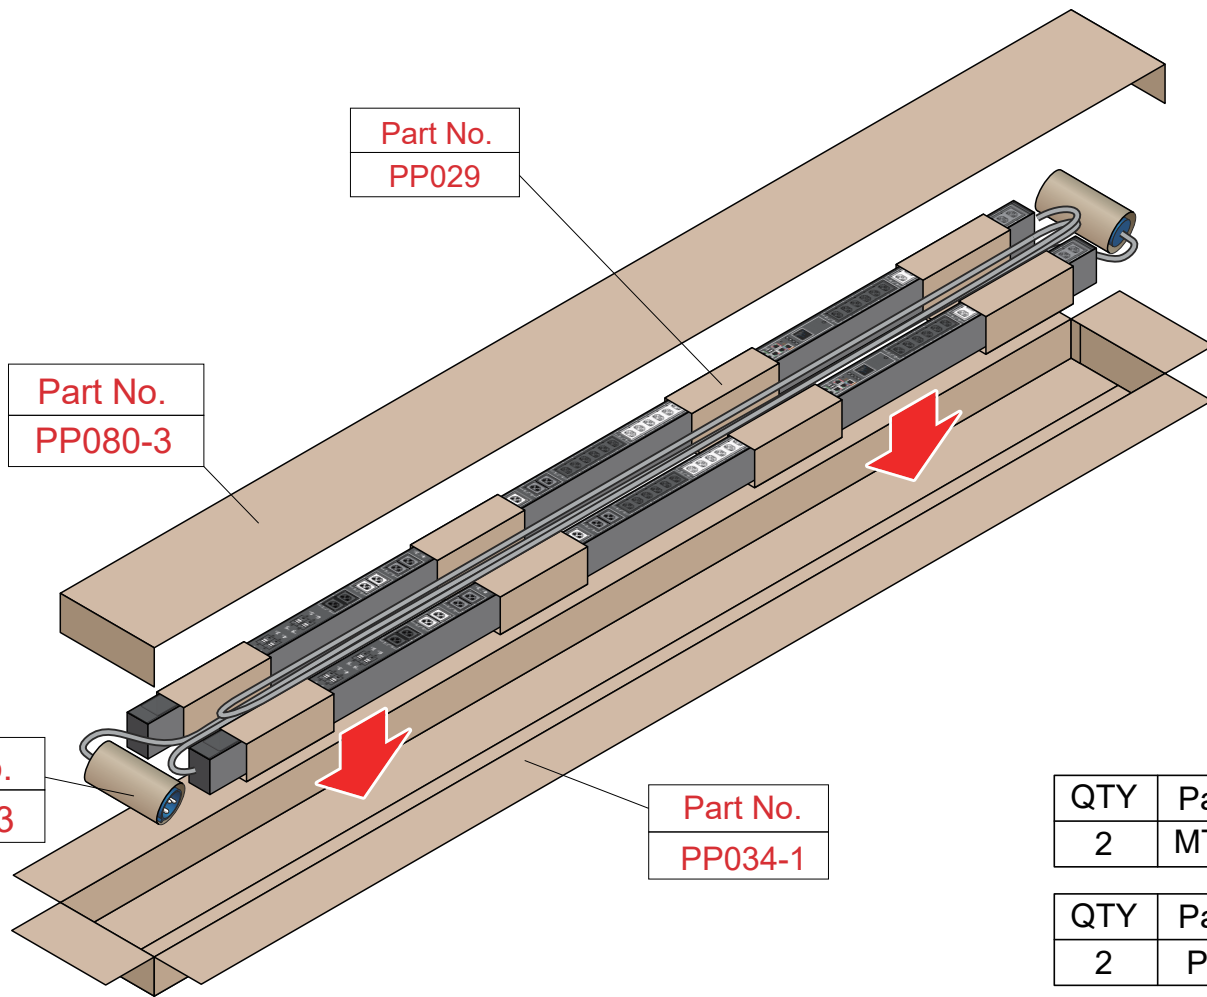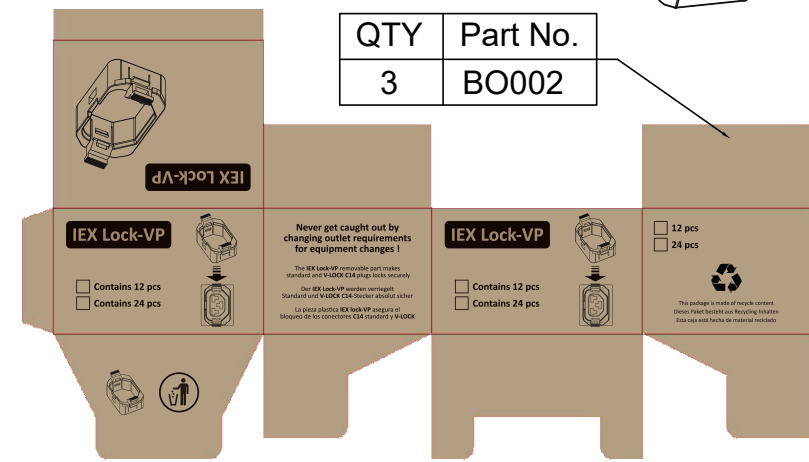


Part No.	PP029
----------	-------

Part No.	PP080-3
----------	---------


Part No.	PP030-3
----------	---------

Part No.	PP034-1
----------	---------


QTY	Part No.
2	MT190-1



QTY	Part No.
2	MT124-1




QTY	Part No.
2	PL178



QTY	Part No.
2	MT124-1

QTY	Part No.
2	MT190-2




QTY	Part No.
6	MT124



QTY	Part No.
2	PL178

QTY	Part No.
2	MT190-3



**PK022**  
Section 22.5x7.2 cm Length 150 cm

Weight: 5kg(2 PDU)